


# DESIGN – CORR PROFILE

## TECHNICAL REFERENCE

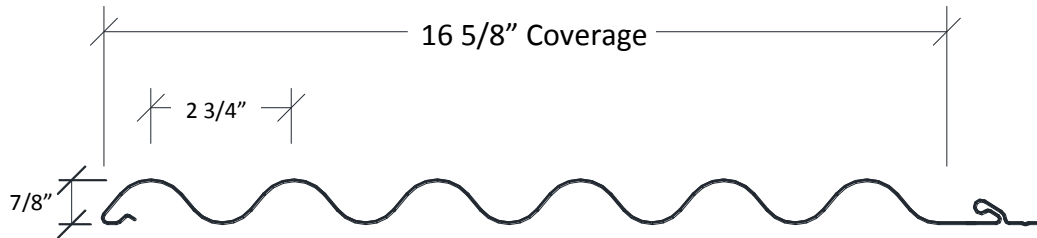

Panel Profile

## PRODUCT OVERVIEW

- Architectural Wall & Roof Application
- Finishes: ProFinish 500 (PVDF) colors & Acrylic Coated Galvalume®
- Available Gauges: 24 ga. standard, 22 ga. optional
- Available in .032, .040 & .050 Aluminum or 16 & 20 oz. Copper
- Applied over solid substrate with proper underlayment
- Concealed fastener corrugated system with positive panel to panel interlock

## GENERAL INFORMATION

- Minimum recommended roof slope of no less than 4:12
- Minimum length panel 6'-0"
- Maximum length panel 40'-0" or transporting limits
- Panel width is 16-5/8" wide & 7/8" deep,
- Also available in .032, .040 & .050 Aluminum, & 16 or 20 oz. Copper

Galvalume® is a registered trademark of BEIC International, Inc.