
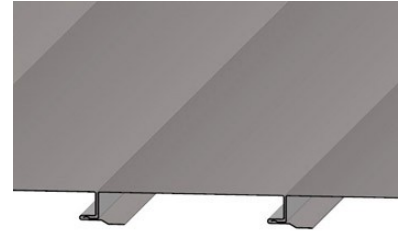


FP-10 Wall & Soffit System

Technical Reference

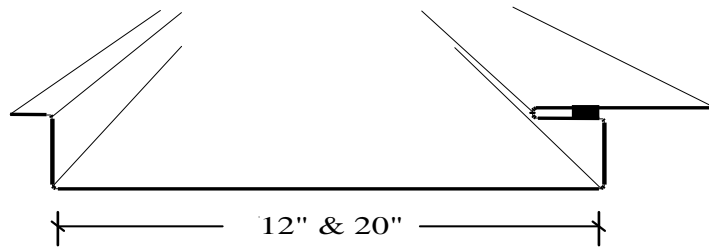


Product Overview

- ◆ Architectural or Structural application
- ◆ Finishes: Kynar 500 (PVFD) Colors and Acrylic Coated Galvalume
- ◆ Available Gauges: 24 ga Standard; 22 ga optional
- ◆ Also available in Copper, Aluminum and Zinc
- ◆ 1 " Deep, 8",12",16" and 20" coverage
- ◆ Applied over Solid Substrate with proper underlayment
- ◆ Stiffening ribs available
- ◆ **Venting** f or airflow-Single, double or triple looped venting available for soffit application

General Information

- ◆ Minimum length panel – 2'-0"
- ◆ Maximum length –40'-0"
- ◆ Field Forming available for panels over 40'
- ◆ Panel available in .032 and .040Aluminum, 16 and 20 oz Copper and Zinc
- ◆ Special width panels upon request
- ◆ Tapered panels available up to 20'-0"
- ◆ Striation, narrower widths and heavier gauges minimize "Oil Canning"

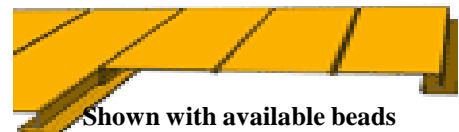

Shown with available beads

RMP recommends all panels be striated to minimize "oil canning". Purchaser must specify smooth or striated panel on order. Rollfab utilizes top quality materials specifically de- signed for rollforming applications, which are tension leveled to help mini- mize oil canning. Oil canning is natu- rally inherent in sheet metal and is not grounds for rejection. Kynar 500 is a registered trademark of Elf Atochem North America Inc. Galvalume is a registered trademark of BEIC Interna- tional, Inc.



www.rollfabmetal.com
602-275-1676 Fax 602-275-1739
2529 W Jackson Street, Phoenix, Arizona 85009