


# FW-10 Wall & Soffit System

## Technical Reference

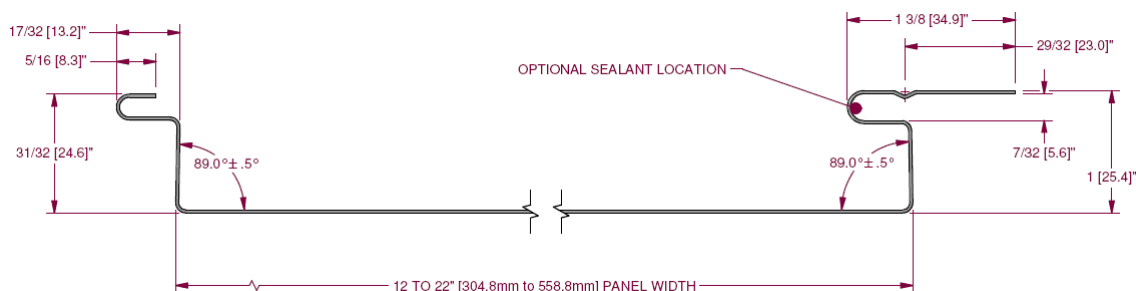

12" Width Standard, 20" optional

## Product Overview

- ◆ Architectural or Structural application
- ◆ Finishes: Kynar 500 ( PVFD) Colors and Acrylic Coated Galvalume
- ◆ Available Gauges: 24 ga Standard; 22 ga optional
- ◆ Also available in Copper, Aluminum and Zinc
- ◆ 1" Deep 12" Standard , 20" coverage optional
- ◆ ASTM E283 and E331 tested, ASTM E330 and 1592 tested
- ◆ Adjustable reveal available 0-3" in 1/2" increments
- ◆ Stiffening ribs, Striations and Pencil Ribs available
- ◆ **Venting** for airflow-Single, double or triple venting



## General Information

- ◆ Minimum length panel – 2'-0"
- ◆ Maximum length – 50'-0"
- ◆ Field Forming available for panels over 50'
- ◆ Panel available in .032 and .040 Aluminum, 16 and 20 oz Copper and Zinc
- ◆ Special width panels upon request
- ◆ Striation, narrower widths and heavier gauges minimize "Oil Canning"

RMP recommends all panels be striated to minimize "oil canning". Purchaser must specify striated or smooth panel on order. Rollfab utilizes top quality materials specifically designed for rollforming applications, which are tension leveled to help minimize oil canning. Oil canning is naturally inherent in sheet metal and is not grounds for rejection. Kynar 500 is a registered trademark of Elf Atochem North America Inc. Galvalume is a registered trademark of BEIC International, Inc.

**RMP**  
ROLLFAB  
METAL PRODUCTS

www.rollfabmetal.com  
602-275-1676 Fax 602-275-1739  
2529 W Jackson Street, Phoenix, Arizona 85009