


# NS-10 PROFILE

## TECHNICAL REFERENCE

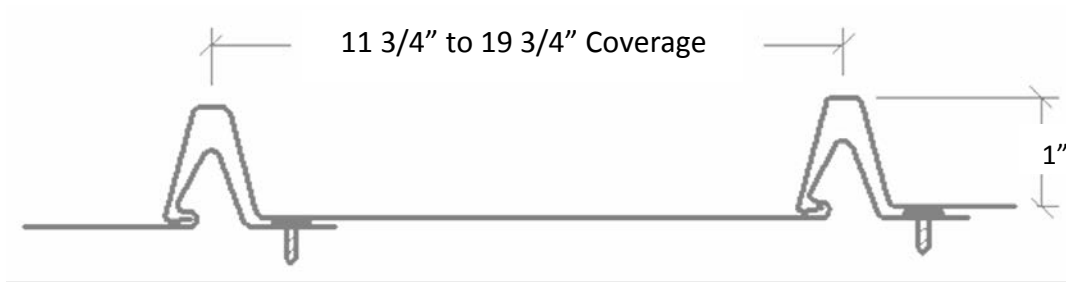

## PRODUCT OVERVIEW

- Architectural Metal Roofing
- Finishes: ProFinish 500 (PVDF) Colors and Acrylic Coated Galvalume®
- Available Gauges: 24 ga. Standard
- Also available in .032 Aluminum & 16 or 20 oz. Copper & Zinc
- 1" Rib height, 11.3/4" or 19.3/4" standard coverage, 16" optional
- Applied over Solid Substrate with proper underlayment
- Slotted fastener hole attachment designed for thermal movement
- Minimum roof slope 3:12

## GENERAL INFORMATION

- Minimum length panel 2'-0"
- Maximum length panel 40'-0"
- Field forming available for panels over 40'-0"
- Panel available in .032 Aluminum, 16 & 20 oz. Copper & Zinc
- Special width panels upon request
- Striation, narrower widths & heavier gauges minimize oil canning
- RMP recommends all panels be striated to minimize oil canning. Purchaser must specify striated or smooth panel on order

## TESTING

- UL-580 Class 90
- Dade County approved PA-125
- UL Construction #600
- Class 4 Impact Resistance rated

Galvalume® is a registered trademark of BEIC International, Inc.