


NS-15 PROFILE

TECHNICAL REFERENCE

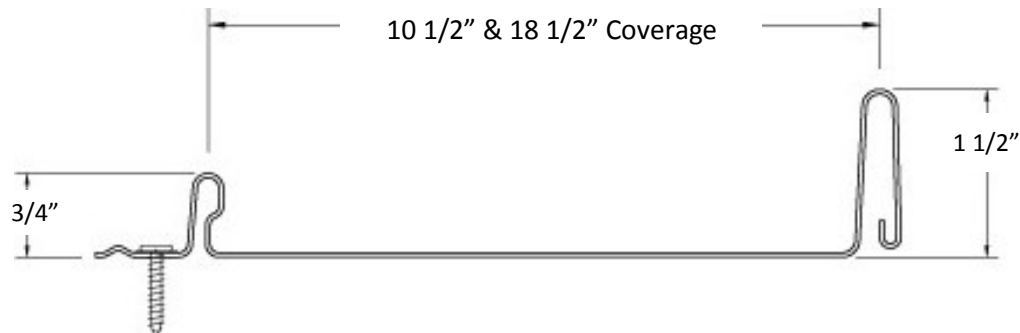


PRODUCT OVERVIEW

- Architectural Metal Roofing
- Finishes: ProFinish 500 (PVDF) Colors and Acrylic Coated Galvalume[®]
- Available Gauges: 24 ga. Standard
- Also available in .032 Aluminum, Copper & Zinc
- 1-1/2" Rib height, 10 1/2" & 18 1/2" standard coverage
- Applied over Solid Substrate with proper underlayment
- Slotted fastener hole attachment designed for thermal movement
- Minimum slope 2-1/2":12

GENERAL INFORMATION

- Minimum length panel 2'-0"
- Maximum length panel 40'-0"
- Field forming available for panels over 40'-0"
- Panel also available in .032 Aluminum & 16 or 20 oz. Copper & Zinc
- Special panel widths upon request
- Striations and narrower widths may minimize appearance of oil canning
- RMP recommends all panels be striated to minimize oil canning. Purchaser must specify striated or smooth panel on order

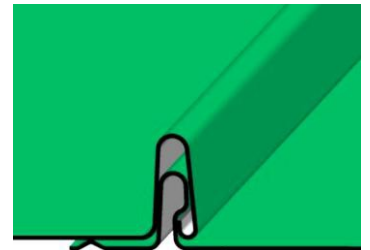

TESTING

- UL-580 Class 90
- Dade County PA-125 Approved
- Dade County FL Approval 9193.1
- UL Construction 587 & 601
- UL-1897 Tested
- Class 4 Impact Resistance rated
- ASTM E-283 Air Infiltration
- ASTM E-331 Water Infiltration

Galvalume[®] is a registered trademark of BEIC International, Inc.

RMP
ROLLFAB
METAL PRODUCTS

www.rollfabmetal.com
602-275-1676 Fax 602-275-1739
2529 West Jackson Street, Phoenix, Arizona 85009