
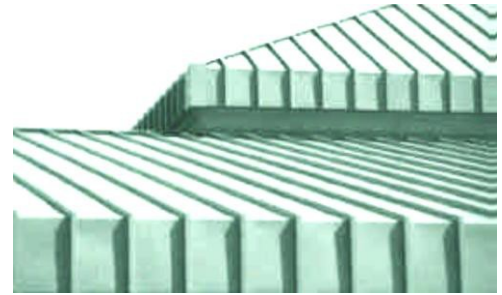


# PB-20 PROFILE

## TECHNICAL REFERENCE

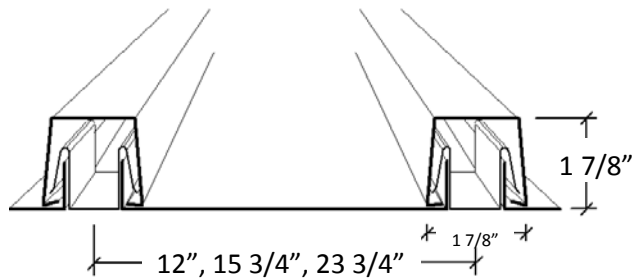

## PRODUCT OVERVIEW

- Architectural or Structural Application
- Finishes: ProFinish 500 (PVDF) colors & Acrylic Coated Galvalume®
- Available Gauges: 24 ga. standard
- Also available in .032 & .040 Aluminum or 16 & 20 oz. Copper & Zinc
- 1 7/8" Rib height, 12", 15 3/4" & 23 3/4" coverage
- Applied over solid substrate with proper underlayment
- Single piece concealed clip designed for thermal movement
- Minimum slope 2-1/2:12
- Striated surface & narrower widths minimize "Oil Canning" appearance
- RMP recommends all panels be striated to minimize oil canning. Purchaser must specify striated or smooth panel on order



Striated Surface available

## GENERAL INFORMATION

- Minimum length panel 2'-0"
- Maximum length panel 40'-0"
- Field Forming available for panels over 40'-0"
- Special width panels upon request
- Narrow battens can be curved for radius applications
- Loned panels for domed roof application
- Tapered panels available up to 20'-0"



Galvalume® is a registered trademark of BEIC International, Inc.