
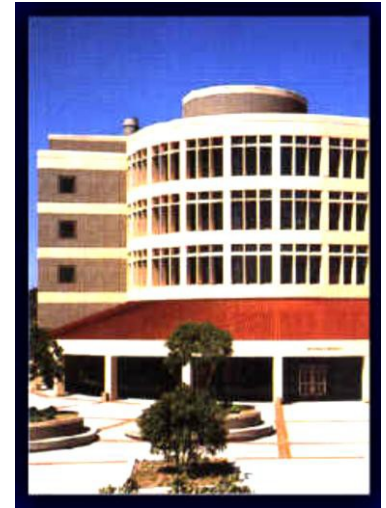


PS-10 PROFILE

TECHNICAL REFERENCE

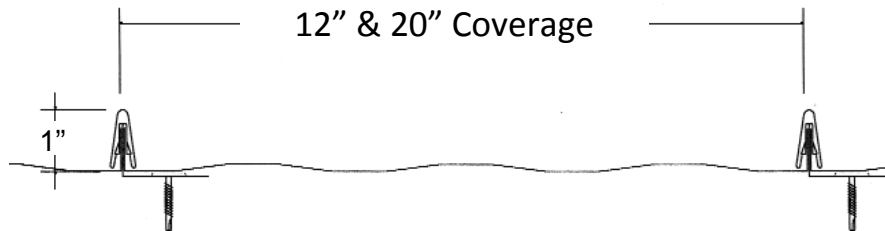


PRODUCT OVERVIEW

- Architectural Metal Roofing System
- Finishes: ProFinish 500 (PVDF) Colors and Acrylic Coated Galvalume®
- Available Gauges: 24 ga. Standard
- Also available in .032 Aluminum, 16 & 20 oz. Copper & Zinc
- 1" Rib height, 12" & 20" standard, 14 1/2" optional
- Applied over Solid Substrate with proper underlayment
- Single piece concealed clip designed for thermal movement
- Minimum slope 3:12
- Factory applied sealant (optional) insures weather-tightness



GENERAL INFORMATION

- Minimum length panel 2'-0"
- Maximum length 40'-0"
- Field forming available for panels over 40'-0"
- Panel available in .032 Aluminum, 16 & 20 oz. Copper & Zinc
- Special width panels upon request
- Narrow battens can be curved for radius application
- Lined panels for domed roof application
- Tapered panels available up to 20'-0"
- Striation, narrower widths & heavier gauges minimize the appearance of "Oil Canning"
- RMP recommends all panels be striated to minimize oil canning. Purchaser must specify striated or smooth panel on order

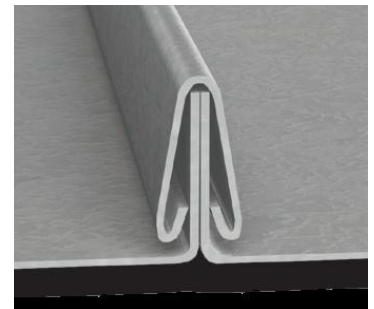

Galvalume® is a registered trademark of BEIC International, Inc.