


# SS-15 PROFILE


## TECHNICAL REFERENCE

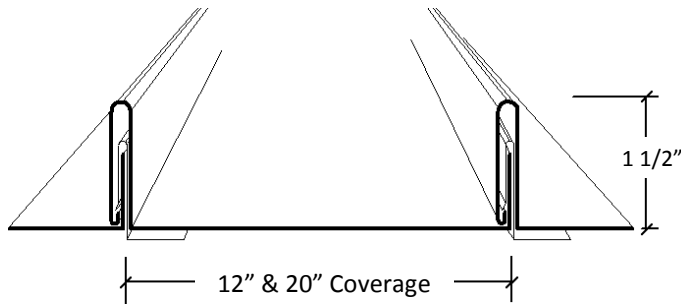


## PRODUCT OVERVIEW

- Architectural Roofing System
- Finishes: ProFinish 500 (PVDF) Colors & Acrylic Coated Galvalume®
- Available Gauges: 24 ga. Standard; 22 ga. optional
- Also available in Copper, Aluminum & Zinc
- 1-1/2" Rib Height, 12" and 20" coverage
- Applied over Solid Substrate with proper underlayment
- Single piece concealed clip designed for thermal movement
- Minimum slope 2-1/2:12
- Factory applied sealant (optional) insures weather-tightness

**Seam Diagram**

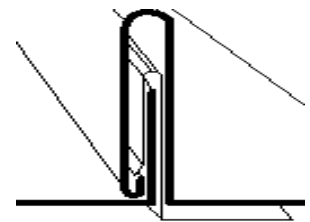

**Clip Diagram**

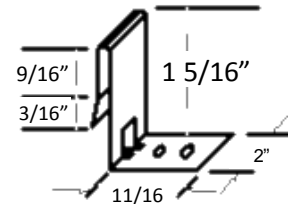

## GENERAL INFORMATION

- Minimum length panel 2'-0"
- Maximum length 40'-0"
- Field forming available for panels over 40'-0"
- Panel available in .032 Aluminum, 16 and 20 oz. Copper & Zinc
- Special width panels upon request
- Tapered panels available up to 20'-0"
- Striation, narrower widths & heavier gauges minimize appearance of "Oil canning"
- RMP recommends all panels be striated to minimize oil canning. Purchaser must specify striated or smooth panel on order/

Galvalume® is a registered trademark of BEIC International, Inc.