


SNAP LOK-150 PROFILE

TECHNICAL REFERENCE

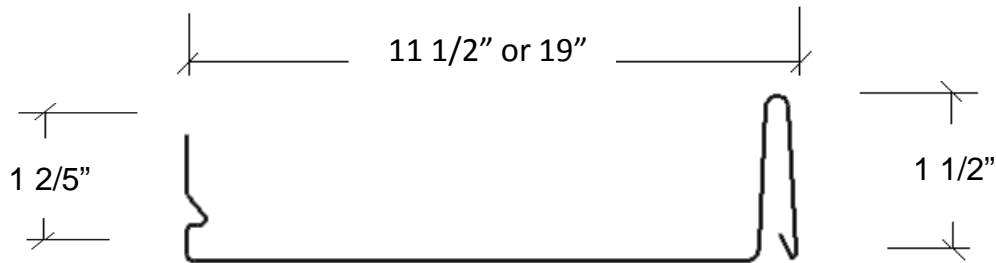

PRODUCT OVERVIEW

- Architectural Metal Roofing Profile
- Finishes: ProFinish 500 (PVDF) Colors and Acrylic Coated Galvalume®
- Available Gauges: 24 ga. standard; 22 ga. optional
- Also available in .032 Aluminum or 16 & 20 oz. Copper & Zinc
- 1 1/2" Rib Height, 11 1/2" & 19" coverage standard, 15" optional
- Applied over solid substrate with proper underlayment
- Single piece concealed clip designed for thermal movement
- Minimum roof slope 2-1/2:12

GENERAL INFORMATION

- Minimum length panel 2'-0" Maximum length panel 40'-0"
- Field forming available for panels over 40'-0"
- Striated surface to minimize appearance of "Oil Canning"
- Special width panels upon request
- Striation, narrower widths & heavier gauges minimize the appearance of "Oil Canning"
- RMP recommends all panels be striated to minimize oil canning. Purchaser must specify striated or smooth panel on order



TESTING

- UL 580 Class 90
- Dade County PA-125 Approved
- Dade County FL. Approval #8629.2
- UL Construction #589
- UL 1897 Tested
- Class 4 Impact Resistance Rated
- ASTM E-283 Air Test
- ASTM E-331

Galvalume® is a registered trademark of BEIC International, Inc.