

NAILBASE ROOF SUBSTRATE
(BY OTHERS)

INSULATION (OPT.) (BY OTHERS)

20GA MIN. OFFSET CLEAT SET IN BUTYL
APPROPRIATE FASTENER @ 8" O.C. MAX

RMP SA-HT SELF-ADHERED UNDERLAYMENT

METAL DECKING (OPT.) (BY OTHERS)

ROLLFAB METAL PRODUCTS MS-150
MECHANICAL SEAM ROOFING PANEL

ROLLFAB METAL PRODUCTS MS-150
LOW-FLOATING ROOF PANEL CLIPS


PITCH TRANSITION FLASHING
APPROPRIATE FASTENERS
@ 24" O.C.

FIELD NOTCH AND BEND PANEL
FACE UP 1 1/2" MIN. CAULK
VERTICALS W/ NON-SKINNING
BUTYL SEALANT

METAL Z-CLOSURE SET
IN BUTYL SEALANT
(SEE FASTENER SEQUENCE)

#44 x 1/8" BLIND PAINTED
RIVETS APPLIED @ 6" O.C.

20GA MIN. HAT CHANNEL
SUPPORT

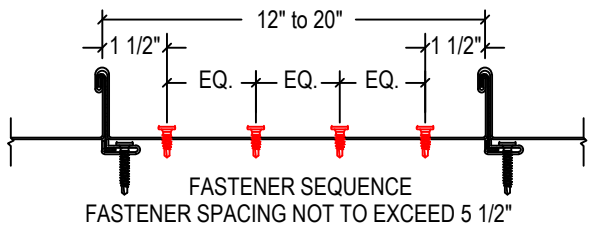

FASTENER SEQUENCE
FASTENER SPACING NOT TO EXCEED 5 1/2"
ANCHORING FASTENER PATTERN

RMP
ROLLFAB
METAL PRODUCTS
www.rollfabmetal.com

STEEP TO LOW PITCH TRANSITION

2529 WEST JACKSON ST, PHX, AZ 85009
PH: (602) 275-1676 FAX: (602) 275-1739

PANEL SYSTEM: MS-150	
ISSUE / REVISION DATE: 1/28/13	DETAIL NO. MS150-PT
NOT TO SCALE	