

NAILBASE ROOF SUBSTRATE  
(BY OTHERS)

INSULATION (OPT.) (BY OTHERS)

20GA MIN. OFFSET CLEAT SET IN BUTYL  
APPROPRIATE FASTENER @ 8" O.C. MAX

RMP SA-HT SELF-ADHERED UNDERLAYMENT

METAL DECKING (OPT.) (BY OTHERS)

ROLLFAB METAL PRODUCTS SL-175  
STANDING SEAM ROOFING PANEL


ROLLFAB METAL PRODUCTS  
SL-175 ROOF PANEL CLIPS

PITCH TRANSITION FLASHING  
APPROPRIATE FASTENERS  
@ 24" O.C.

FIELD NOTCH AND BEND PANEL  
FACE UP 1 1/2" MIN. CAULK  
VERTICALS W/ NON-SKINNING  
BUTYL SELANT

METAL Z-CLOSURE SET  
IN BUTYL SEALANT  
(SEE FASTENER SEQUENCE)

#44 x 1/8" BLIND PAINTED  
RIVETS APPLIED @ 6" O.C.

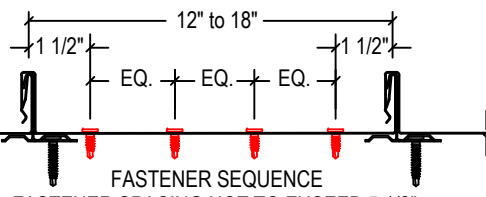

FASTENER SEQUENCE  
FASTENER SPACING NOT TO EXCEED 5 1/2"  
ANCHORING FASTENER PATTERN



PANEL SYSTEM: SL-175

**STEP TO LOW PITCH TRANSITION**

ISSUE / REVISION  
DATE:  
1/28/13

DETAIL NO.  
**SL175-PT**

2529 WEST JACKSON ST, PHX, AZ 85009  
PH: (602) 275-1676 FAX: (602) 275-1739

NOT TO SCALE