


- ROLLFAB METAL PRODUCTS
MS-150 MECHANICAL SEAM
ROOFING PANEL
- ROLLFAB METAL PRODUCTS
MS-150 LOW-FLOATING ROOF
PANEL CLIPS
- NAILBASE ROOF SUBSTRATE
(BY OTHERS)
- RMP SA-HT SELF-ADHERING
UNDERLAYMENT
- INSULATION (OPT.)
(BY OTHERS)
- METAL DECKING (OPT.)
(BY OTHERS)

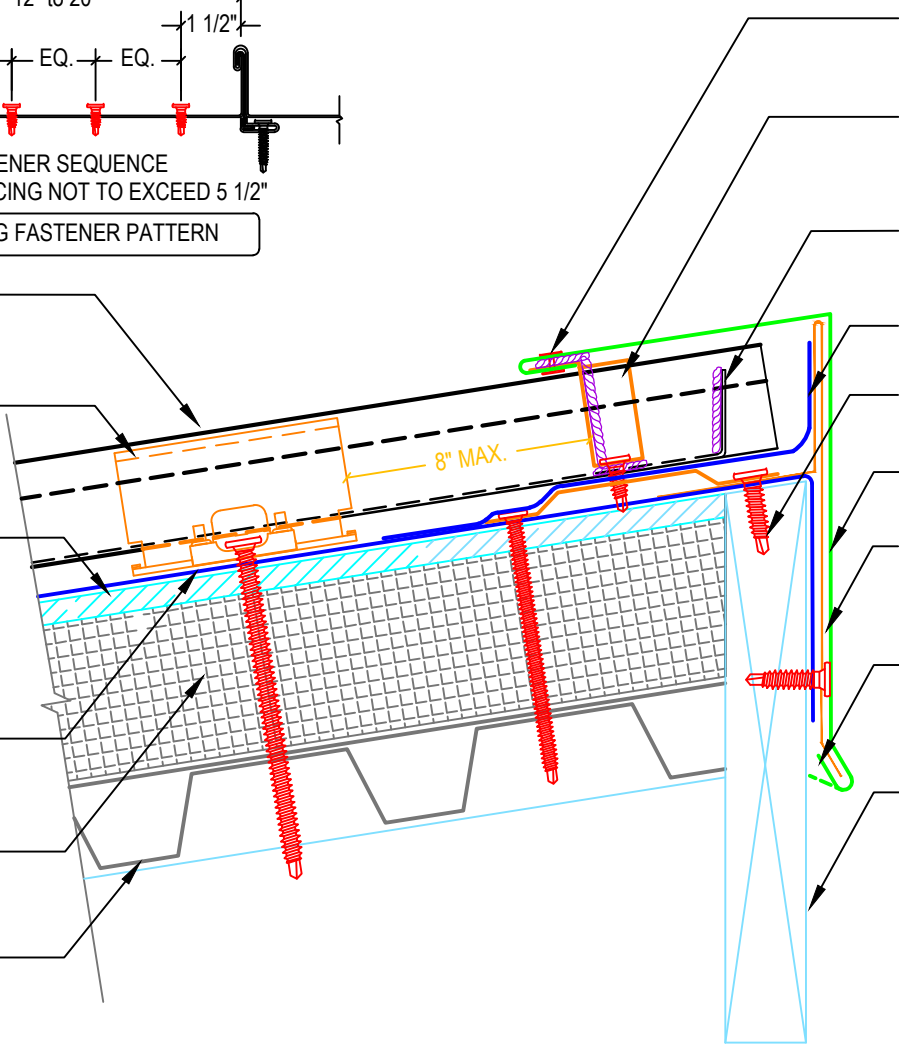

- #44 x 1/8" BLIND PAINTED
RIVETS APPLIED @ 6" O.C.
- METAL Z-CLOSURE SET IN
NON-SKINNING BUTYL SEALANT
(SEE FASTENER SEQUENCE)
- FIELD NOTCH AND BEND PANEL
FACE 1 1/2" MIN., CAULK VERTICALS
W/ NON-SKINNING BUTYL SEALANT
- MIN. 6" WIDE RMP SA-HT
SELF-ADHERED UNDERLAYMENT
- APPROPRIATE FASTENERS
STAGGERED @ 24" O.C.
- HIGH EAVE (PEAK CAP)
FLASHING
- 22GA. MIN HIGH EAVE CLEAT
W/ APPROPRIATE FASTENER
@ 24" O.C.
- FIELD CRIMP @ 12" O.C.
- HIGH EAVE FASCIA
(BY OTHERS)

8" MAX.

RMP
ROLLFAB
METAL PRODUCTS
www.rollfabmetal.com

HIGH EAVE

2529 WEST JACKSON ST, PHX, AZ 85009
PH: (602) 275-1676 FAX: (602) 275-1739

PANEL SYSTEM: MS-150	
ISSUE / REVISION DATE: 1/28/13	DETAIL NO. MS150-HE1
NOT TO SCALE	