




OFFSET CLEAT (OFFC1)




PITCH TRANSITION FLASHING (PT1)

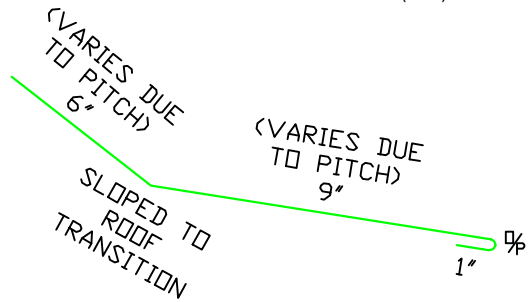


ZEE CLOSURE (ZC1)

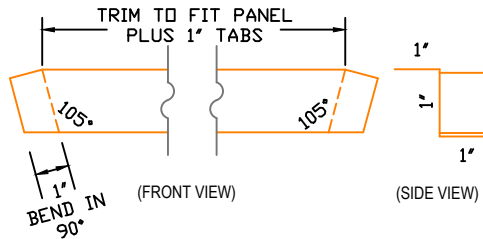

NOTCH END, FILL W/ SEALANT, TAB OVER TO CUT EDGE, & TRIM



20GA MIN. OFFSET CLEAT (OFFCL1) SET IN BUTYL W/ APPROPRIATE FASTENER @ 8" O.C. MAX

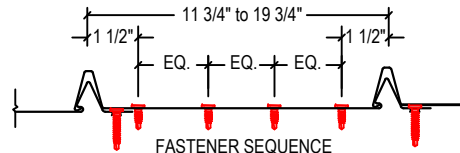

FASTENER SEQUENCE  
FASTENER SPACING NOT TO EXCEED 5 1/2"

ANCHORING FASTENER PATTERN

PITCH TRANSITION FLASHING  
APPROPRIATE FASTENERS  
@ 24" O.C.

FIELD NOTCH AND BEND PANEL  
FACE UP 1 1/2" MIN. CAULK  
VERTICALS W/ NON-SKINNING  
BUTYL SELANT

METAL Z-CLOSURE (ZC1) SET  
IN BUTYL SEALANT  
(SEE FASTENER SEQUENCE)

#44 x 1/8" BLIND PAINTED  
RIVETS APPLIED @ 6" O.C.

ROLLFAB METAL PRODUCTS  
NS-10 ROOF STANDING SEAM  
ROOF PANELS

NAILBASE ROOF SUBSTRATE  
(BY OTHERS)

MANUFACTURE APPROVED  
UNDERLAYMENT

**RMP**  
**ROLLFAB**  
 METAL PRODUCTS  
 www.rollfabmetal.com

### STEEP TO LOW PITCH TRANSITION

2529 WEST JACKSON ST, PHX, AZ 85009  
PH: (602) 275-1676 FAX: (602) 275-1739

PANEL SYSTEM: NS-10

ISSUE / REVISION  
DATE:  
1/28/13

DETAIL NO.  
NS10-PT

NOT TO SCALE